

## Patent Abstracts of Japan

PUBLICATION NUMBER : 02036741  
PUBLICATION DATE : 06-02-90


APPLICATION DATE : 26-07-88  
APPLICATION NUMBER : 63185717

APPLICANT : KOYO SEIKO CO LTD;

INVENTOR : KIYOUTANI HIROTOMO;

INT.CL. : H02K 1/02 H02K 1/22

TITLE : ROTOR

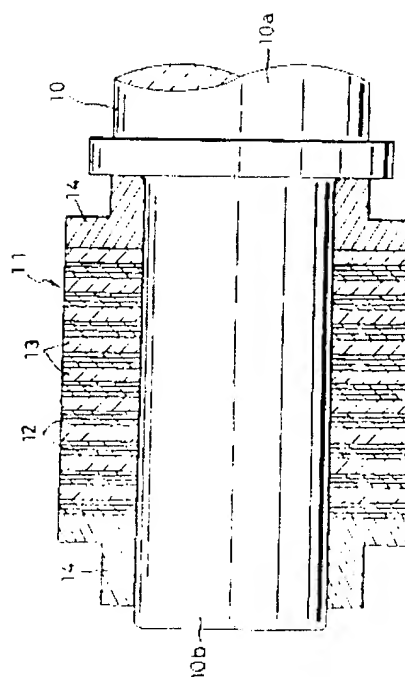

ABSTRACT : PURPOSE: To protect a soft magnetic part from breakdown when it is assembled by laminating an yet sintered soft magnetic disc part made of amorphous magnetic material and having the thickness of 25-40 $\mu$ m around a shaft.

CONSTITUTION: A small diameter section 10b is formed integrally at one end of the large diameter section 10a of a shaft 10. Plural sheets of soft magnetic disc parts 12 and one auxiliary disc part 13 are pressure laminated alternately around the small diameter section 10b thus constituting a rotor core 11. The soft magnetic part 12 is composed of amorphous magnetic material having tensile strength higher than 200kg/mm<sup>2</sup> and the thickness thereof is in the range of 25-40 $\mu$ m. The soft magnetic part 12 is not subjected to sintering for improving the magnetic characteristic. By such arrangement, a soft magnetic part which is not broken during assembly or operation can be obtained.

COPYRIGHT: (C) JPO